




# 30 FT CONTAINERIZED STORAGES

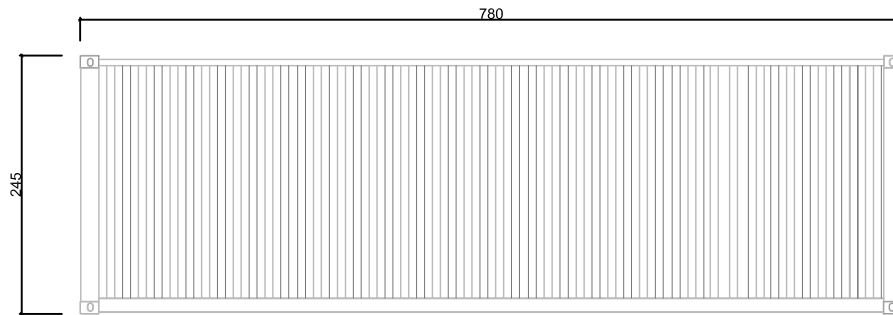


LEFT SIGHT

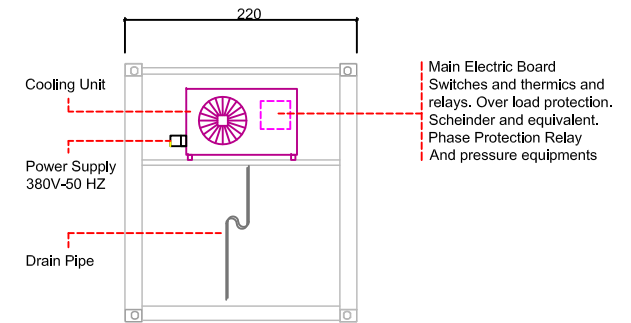

BACK SIGHT

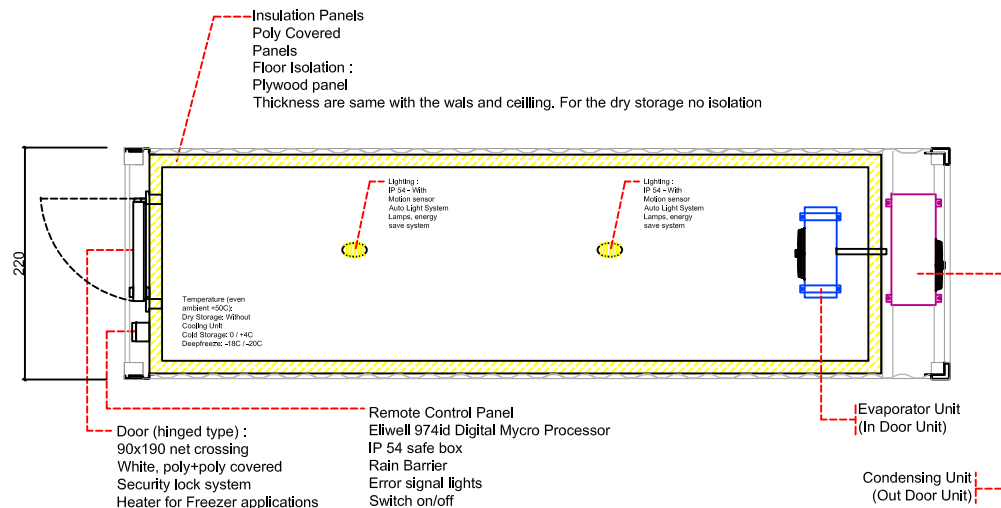

TOP SIGHT

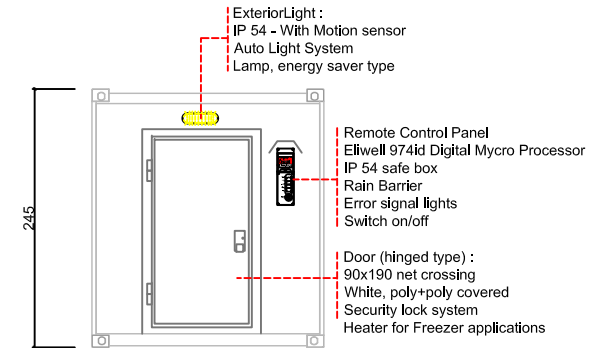

FRONT SIGHT

Insulation Panels  
Poly Covered  
Panels  
Floor Isolation :  
Plywood panel  
Thickness are same with the wals and ceiling. For the dry storage no isolation

Lighting :  
IP 54 - with  
Motion sensor  
Auto Light System  
Lamps, energy  
save system

Lighting :  
IP 54 - with  
Motion sensor  
Auto Light System  
Lamps, energy  
save system

Temperature (even  
ambient +50C);  
Dry Storage Without  
Cooling Unit  
Cold Storage 0 ~ +4C  
Deepfreeze -18C ~20C

Door (hinged type) :  
90x190 net crossing  
White, poly+poly covered  
Security lock system  
Heater for Freezer applications

Remote Control Panel  
Eliwell 974id Digital Mycro Processor  
IP 54 safe box  
Rain Barrier  
Error signal lights  
Switch on/off

Evaporator Unit  
(In Door Unit)

Condensing Unit  
(Out Door Unit)

ExteriorLight :  
IP 54 - With Motion sensor  
Auto Light System  
Lamp, energy saver type

Remote Control Panel  
Eliwell 974id Digital Mycro Processor  
IP 54 safe box  
Rain Barrier  
Error signal lights  
Switch on/off

Door (hinged type) :  
90x190 net crossing  
White, poly+poly covered  
Security lock system  
Heater for Freezer applications

Cooling Unit

Power Supply  
380V-50 HZ

Drain Pipe

Main Electric Board  
Switches and thermics and  
relays. Over load protection.  
Scheinder and equivalent.  
Phase Protection Relay  
And pressure equipments